

Steel, Nylon RAZ or Nylon angle rack
A variety of rack available in different lengths, for different strengths



CENTURION Infrared beams
Always recommended on any gate automation installation



P36
Passive sensitive edge provides additional protection against crushing



POLOphone intercom
Allows visitors to communicate with people inside in order to gain access to the property



SMARTGUARD or SMARTGUARDair keypad
Cost-effective and versatile wired and wireless keypad, allowing access to pedestrians



FLUX SA Loop Detector
Allows free-exit of vehicles from the property - requires ground loop to be fitted



CENTURION transmitters
Available in one-, two-, three- and four-button variants. Incorporates code-hopping encryption



Pedestrian keyswitch
Basic key-operated switch, allowing for access to pedestrians



Gooseneck
Steel pole for mounting intercom gate station or access control reader




Wheel kits
A variety of wheel kits are available from your CENTURION dealer



G-SWITCH-22 devices
Allows for monitoring and activating the operator, via your phone, from anywhere in the world that has 2G GSM network coverage



SOLO/Lattice Proximity Access Control System
Proximity reader allowing for access to both pedestrians and vehicles, while offering a higher level of security than a keypad



Theft-resistant cage & padlock
Retro-installable steel cage that increases the resistance of the operator against theft



DC Converter
Provides battery backup to the system

TECHNICAL SPECIFICATIONS

	ENDURANCE	HEAVYWEIGHT
Input voltage	220V ± 10%, 50Hz (single phase) ¹	
Motor voltage	220V AC three-phase	
Maximum absorbed current	6A	
Output pinion	20 tooth mod 4	17 tooth mod 4
Gate speed at rated push force	Standard speed	16m/min
	Sprint speed	30m/min ²
Gate mass - max	Standard speed	1000kg
	Sprint speed	600kg
Maximum gate length	20m	
	Operator push force - rated	30kgf
	Sprint speed	22.5kgf
Manual override	L lockable lever with key release	
Duty cycle	80% ³	
Operating temperature range	-20°C to +50°C	
Anti-crushing sensing	Electronic	
Motor thermal protection	Electronic	
IP rating	44	
Optional battery backup	Yes	
Shipping mass of unit	15kg	

1. 110V 60Hz available to order
2. Varies with load
3. Based on 25°C ambient temperature and unit not in direct sunlight

DC CONVERTER BATTERY BACKUP MODULE FOR THE A10

A simple connection that enables your A10 to stay on guard when the lights go off.


- On-demand battery backup protection
- Brown-out power failure detection
- Battery-protection circuitry
- Thermal overload cut-out
- Integrated battery charger
- Power-saving mode
- System diagnostic outputs



TECHNICAL SPECIFICATIONS


	DC CONVERTER
Input voltage	12V DC
Battery charger	220V ± 10%, 50Hz ¹
Input current	DC Converter at rated load
	Battery charger
Rated output voltage	310V DC
Batter charger	2A ²
Operating cycles per Ah of capacity	Minimum one open/close cycle ³
Maximum duty cycle	20% ⁴
Thermal protection	Electronic
Minimum battery size	12Ah, but 35Ah is recommended ⁵
Enclosure	IP65 External plastic enclosure
Dimensions	330mm x 260mm x 120mm
Shipping mass	5kg (excluding battery)

1. Can operate off a solar supply, consult Centurion Systems (Pty) Ltd for assistance
2. Upgradable on request
3. 4m gate at rated thrust
4. Based on 25°C ambient temperature and unit not in direct sunlight
5. Battery housed in separate enclosure

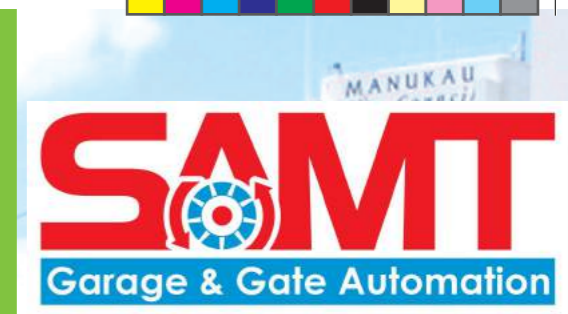


INDUSTRIAL SLIDING GATE OPERATOR

Invert your thinking with the ultimate industrial automation solution



SLIDING GATE OPERATORS

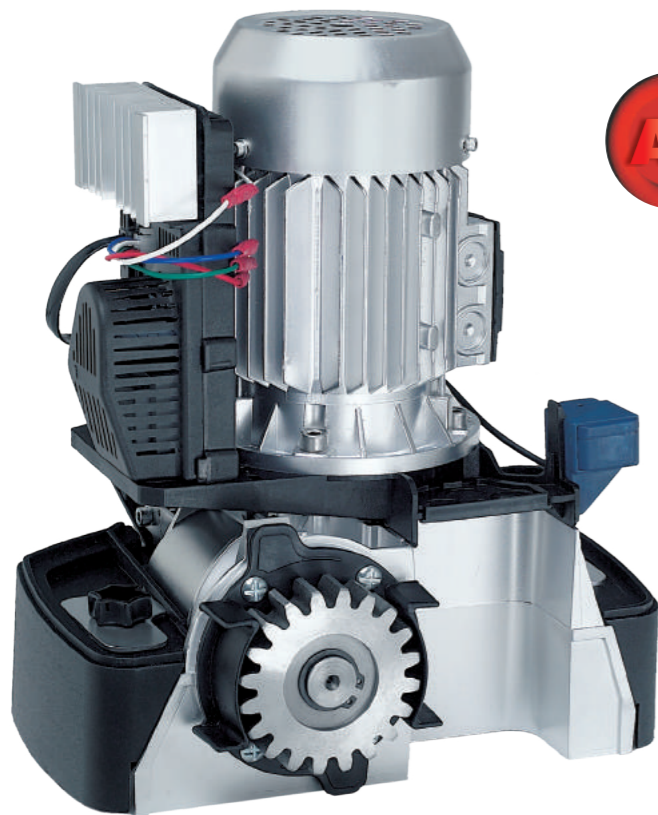

We selected the best parts of our other gate operators, put them all together and bred the monster we affectionately refer to as the **A10**.

The **A10**'s hybrid custom-designed frequency inverter and high-torque three-phase motor puts it firmly at the top of the food chain.

Big, strong and anything but dumb, this juggernaut can haul up to a two tonne gate - and bring it to a comfortable stop just as easily. Fortunately, this giant is friendly - sensitive anti-crushing control protects your car and loved ones.

Human ingenuity and an almost alien technology have given birth to the **A10** - the natural selection in sliding gate operators.

MAIN FEATURES



Smooth and strong

A punier operator would move your big gate very grudgingly - resulting in a lot of rattling and wobbling that takes a serious toll on your system's longevity. The **A10**'s powerful inverter three-phase motor combination treats even the most massive gate like it's a featherweight - moving with a silky smoothness that ensures a long and healthy life.



Boundless energy


A DC-to-DC converter¹ provides reliable battery backup ensuring that during a power failure, your two tonne gate doesn't become a two tonne wall, ensuring that you can always get in - but criminals can't.

¹. DC Converter battery backup module for A10 is an optional extra




Jam-free manual release

You don't have to be a weightlifter to move your gate. In the highly unlikely event that your **A10** isn't able to perform, an easy to use jam-free manual release allows you to get in or out, without tearing any muscles.



Intelligent speed control

What is power without control? With our intelligent speed control, you can set your gates the way you like them. The **A10** can be set to open a one tonne gate at speeds of up to 30 metres per minute (16m/min for a heavier gate) for your security, then close slowly for added safety. If you're worried about someone sneaking in behind you, set your gate to close rapidly - and slam the door on crime.



Alert and agile

This mighty giant is far from clumsy. The **A10** has the grace of a ballerina. Our DOSS (Digital Origin Seeking System) keeps track of the gate position at all times and ensures pin-point stopping. This reliable positioning makes installation quick and easy and your gate will never overshoot the mark and damage itself. Plus, there are no external limit switches to fit or adjust - the **A10** does everything for you.



Small appetite

This brute devour all of your electricity. The **A10**'s three-phase induction motor runs on single phase power so you won't have to install an expensive power supply just to feed it. Get all the power of three-phase - but pay only for single phase.



Personality

The **A10** has an operating mode for any application and will feel equally at home operating a townhouse gate or an industrial access point.



Staying power

Inertia doesn't exist in the **A10**'s universe. Our **A10** generates starting and running torques that makes other gate operators feel particularly inferior. Our die-cast aluminium gearbox is the very definition of rugged. Being so strong means that you never have to strain - the **A10** will last longer as its parts are never put under any serious stress. The three-phase motor and extremely efficient inverter drive allows the **A10** to operate at duty cycles of up to 80% - so it just keeps on going and is perfect for high-volume applications. Install, set and forget.



Sensitive

With great power comes great responsibility. The thought of a two tonne gate bearing down on your new car or puppy gives us the shivers. Fortunately, the **A10**'s brute force is kept in check by our extremely sensitive anti-crushing protection technology.